

**CRAFT**<sup>®</sup>

**Designed & Built With Quality**

 ANTI SCRATCH GLASS LAMINATE

**2mm ANTI SCRATCH ACRYLIC SHEETS**

## COLLECTION

Available in Size : **2440mm x 1220mm (8 Feet x 4 Feet)**

Thickness : **2mm**

(+/-10% Variation)

## APPLICATIONS

- Kitchen • Work tops • Tables • Doors • shelves • Cabinets • Trolleys
- Bathroom • Work Tops • Shelves • Cabinets • Furniture • Healthcare
- Wall Lining and Horizontal Surfaces • Lockers • Cabinets • Trolleys
- Commercial • Hospitality & Restaurant Tables • Counter Tops • Doors
- Cubicles • Lockers • Cabinets • Wall Cladding & Partition



## GENERAL USE & CARE GUIDE

**CRAFT** acrylic sheets are manufactured with aesthetics and durability in mind. When used as recommended and with appropriate care, our laminates will last through the years. **CRAFT** acrylic sheets are easy to maintain.

## LAMINATES

- Cleaning Should be done with water and a clean, non-abrasive cloth.
- To remove more stubborn stains, use mild household cleansers like colin IP gently wipe down with a non-abrasive cloth.
- Avoid the use of abrasive liquid cleansers, bleaching compounds or solution as these may damage the surface of the laminate.
- Do not place hot cookware directly on the laminate. Prolonged exposure to temperatures above 30° degree Celsius may cause damage to the laminate surface.
- Do not use the laminate for purposes that it is not intended for (E.g. do not iron, chop, hammer or expose the laminate to open flame.)
- Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strict not recommended.
- UV rays may deshape the laminate.
- Gloss surfaces are recommended only for vertical application.
- Do not use thinner and loluene on the surface of the **CRAFT** acrylic sheet. this may cause decourisation of the surface.
- Store the laminates at temperature below 30° degree celsius.
- Typically conform to internationally recognize technical standards.
- Have a thickness balance of +/- 10%
- Peel off the protective film after processing.

## WHY YELLOW PATCHES AND COLOUR FADE PROBLEM APPEARS AFTER THE INSTALLATION OF ACRYLIC LAMINATE?

**The reason behind this problem is as follows :**

When Acrylic laminate experiences or faces direct fall of sunlight on it which leads to discolouring, fading and yellowness in laminate.


Using of inferior quality or not as per standard quality dipped plywood & dipped lipping patti may lose the colour due to chemical reaction between adhesive at the time of bonding period and yellow patches appear after the installation.

Using synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) lead to colour patches on Acrylic laminates.

Prolonged exposure temperature above 30° cor placing hot cookware directly on the Acrylic laminates cause patches on Acrylic laminates surface.



Shake it well and lightly spray on the surface




Wipe the surface clean using a light circular motion









**R - 601**



**R - 602**




**R - 603**




**R - 604**

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.






**R - 605**



**R - 606**



**R - 607**




**R - 608**

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.






**R - 609**



**R - 610**



**R - 611**




**R - 612**

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.








**R - 613**



**R - 614**




**R - 615**




**R - 701**

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.



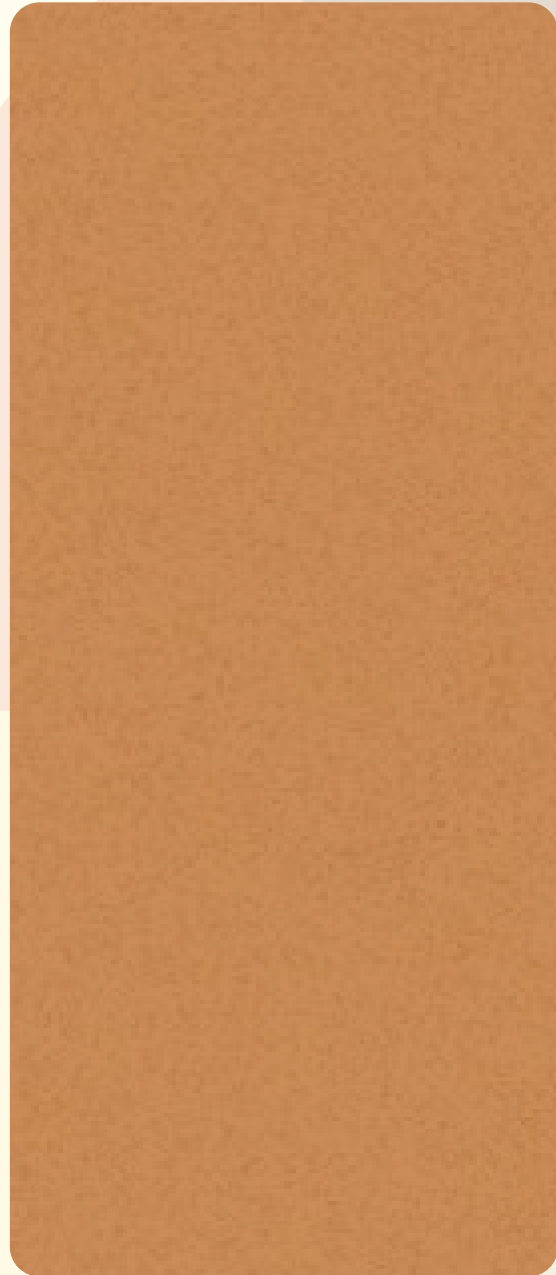

**R - 702**



**R - 703**




**R - 704**




**R - 705**

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.




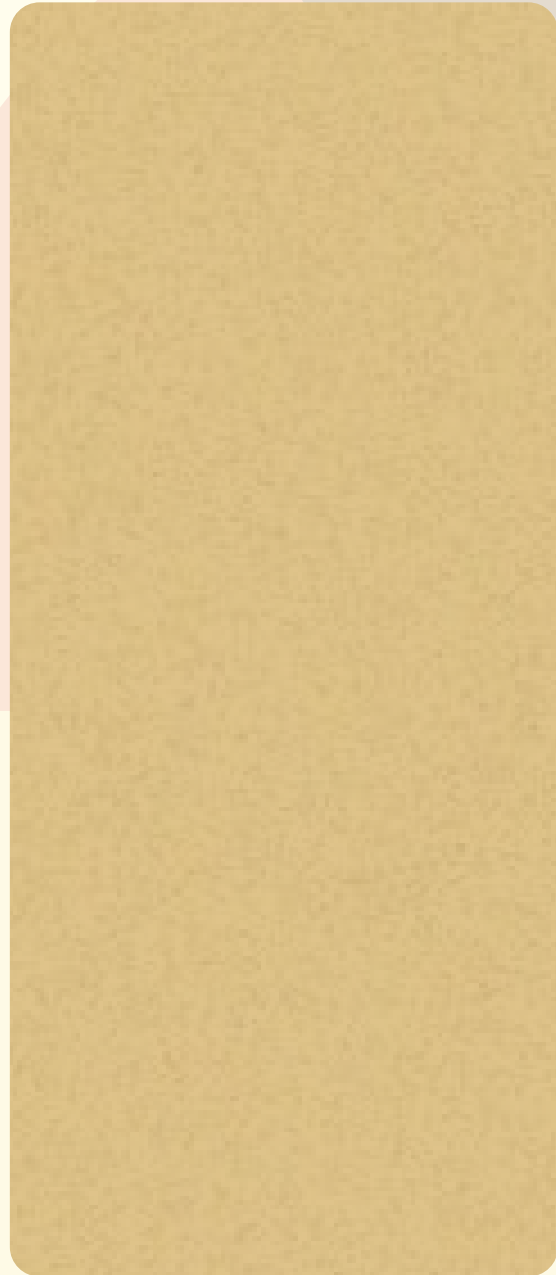

R - 706

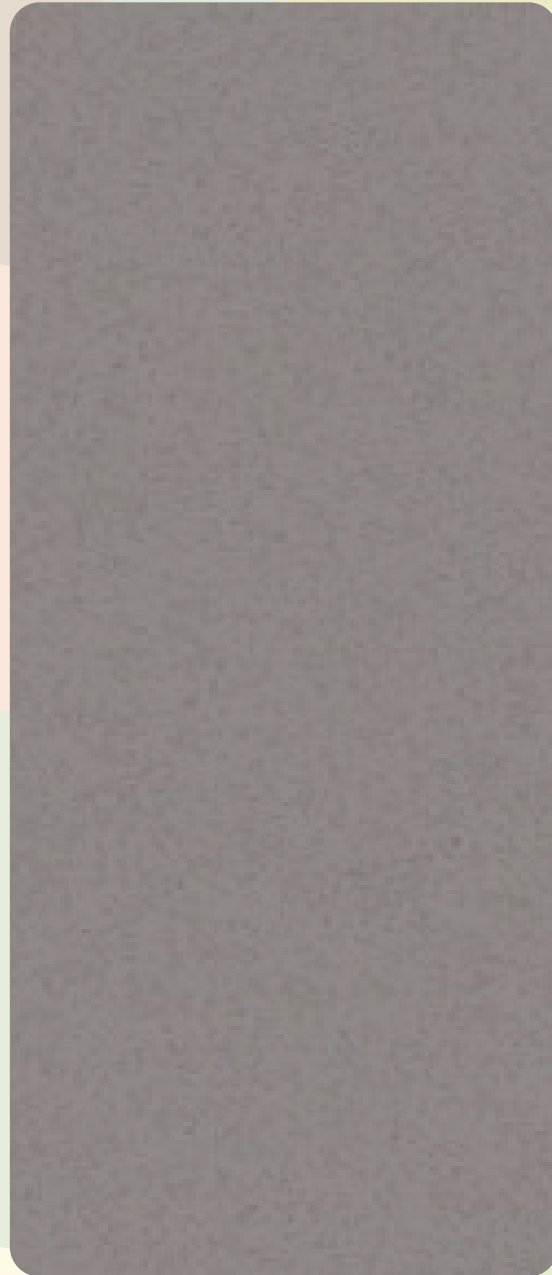

R - 707

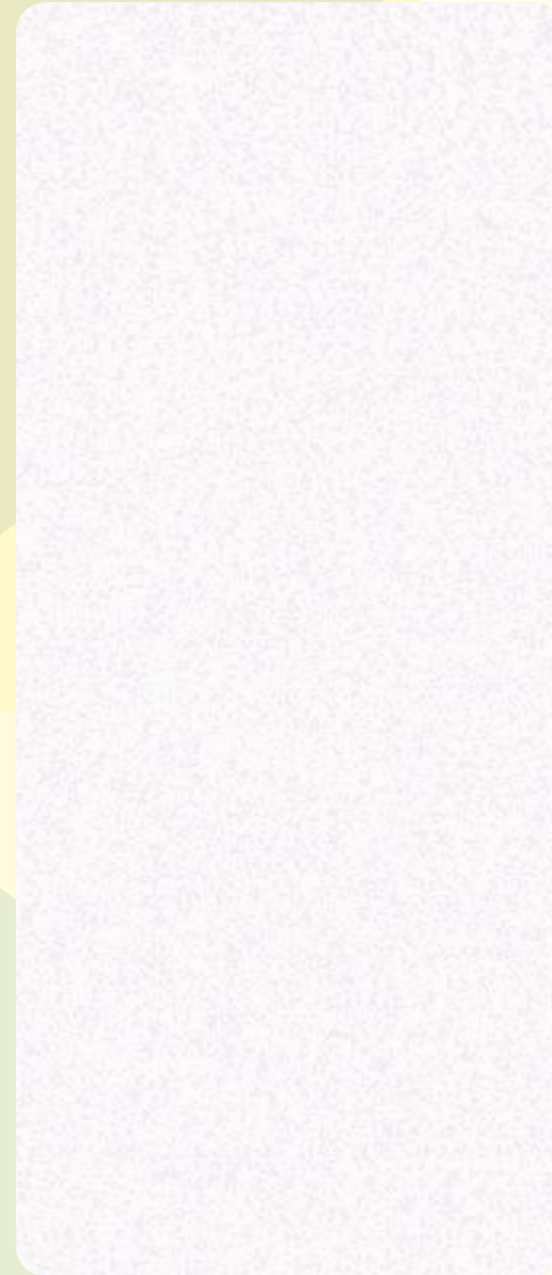

R 708




R - 709

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.






**R - 710**



**R - 711**



**R - 712**

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.





©

**CRAFT**®

**Designed & Built With Quality**

**CRAFT**®  
PLYWOOD

**CRAFT**®  
BLOCK BOARD

**CRAFT**®  
VENEER

**CRAFT**®  
FLUSH DOOR

**CRAFT**®  
FILM FACE PLY

**CRAFT**®  
IMPORTED / BURMIES PLY

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations.  
Actual colours of the laminates sheet may vary from this brochure.